

# USER MANUAL

CICI TT i-Size



Joyful Kids · Joyful Trip

[www.jovikids.com](http://www.jovikids.com)

[@jovikids\\_global](https://www.instagram.com/jovikids_global)

[service@jovikids.com](mailto:service@jovikids.com)

---

## Model WDCS010

All rights reserved @2024 JOVIKIDS. JOVIKIDS and all associated logos are trademarks.  
All product specifications are correct at time of print.  
JOVIKIDS reserves the right to change anything at any time without prior notice.  
Color representation is as close as processes allow.

Approx.  
**15M-12Y**

**76-150cm**





**EN** Scan for user manual

**DE** Scan für Benutzerhandbuch

**FR** Scannez pour le manuel d'utilisation

**IT** Scansiona per il manuale utente

**ES** Escanear para el manual del usuario

**JP** QRコードをスキャンして説明書を表示します

**AR** بحث عن كتاب المستخدم

**RU** сканируйте для руководства пользователя

•

•

•

# CONTENTS

<b>Content</b>	1
<b>Introduction</b>	2
<b>Important Information</b>	3-4
<b>Know Your Car Seat</b>	5-6
<b>Car Seat Version</b>	7
<b>Suitability</b>	8
<b>Use in the Vehicle</b>	9-10
<b>Securing Your Baby</b>	11-13
Using Baby Insert	11
Harness & Headrest Adjustment	12
To Change the Reclining Positions	13
<b>Installation in the Vehicle</b>	14-21
Installation Instruction for Stature 76-105cm,	
Forward Facing , ISOFIX + Tether + Harness	14-17
Installation Instruction for Stature 100-150cm	
Forward Facing, ISOFIX Attachment + 3-Point-Belt	18-20
Installation Instruction for Stature 100-150cm,	
Forward Facing, 3-Point-Belt	21
<b>Care Instructions</b>	22-23
Cleaning	22
Security Checking	22
Warranty	23

# INTRODUCTION

Dear Parents,

Thank you very much for purchasing our product.

The functions and design of this car seat offer safety and comfort when your child is in this child restraint.

In order to use safely, please adjust the child restraint till it is suitable for your child .

Please take care to use this car seat and read the instruction manual carefully.

Research shows that a high number of car safety seats are incorrectly installed.

Therefore, please take the time to read through the instruction manual carefully.

Our product offers maximum safety only when it is used in accordance with the instructions.

Continuous research by our development team, user tests and consumer reactions ensure that we are kept fully up to date in the field of child safety.

Therefore, if you have any questions concerning use of our product, please do not hesitate to contact us.

You can see our contact information on our website.



# IMPORTANT INFORMATION

## WARNING

- Read this instruction manual carefully.
- The correct fitting of the ISOFIX and top tether anchoring systems is of vital importance for the safety of your child.
- For the future using of the seat, it is important that you keep the instruction manual carefully. There is an instruction storage on the back of the seat where the instruction can be retained with the child restraint.
- Never leave your child unattended in the car.
- Do not use a child safety seat if the vehicle seat is equipped with a front airbag. This can be dangerous. This does not apply to side airbags.

### ■ IMPORTANT - DO NOT USE BEFORE THE CHILD'S AGE EXCEEDS 15 MONTHS(Refer to instruction)".

- Before using our product, please read the instruction manual carefully, the product is a safety product and is only safe when used in accordance with the instruction manual.
- The product must only be used on a forward facing seat that is fitted with the ISOFIX and support leg anchoring systems.
- The product may be used on either the front or the back seat. However, we recommend that it is fitted on the back seat.
- The product has been approved according to the strictest European safety standards(R129/03) and is for stature 76-105cm(child mass limit 18kg), forward facing, ISOFIX+ top tether+ harness and is for stature 100-150cm, forward facing, ISOFIX attachment + vehicle 3 point belt and is for 100-150cm, forward facing vehicle 3 point belt.
- After an accident the seat may become unsafe due to damage that is not be noticeable immediately. It should therefore be replaced.
- The safety of the seat can only be guaranteed by the manufacturer if it is issued by the original owner.
- We advise you strongly that not to use a second-hand product, because you are not sure if it is in good condition.
- The harness pads and crotch pad are important for the safety of your child therefore use them for stature 76-105cm.
- Ensure that all luggage and objects likely to cause injury in the event of an accident are properly secured.


- Do not use this child seat in passenger seats are equipped with airbags.
- It is recommended that the car seats should not be used more than 5 years from the date of production. The properties of the products may deteriorate due to, for example, ageing of the plastic and this may not be visible.
- The baby car seat must not be used without the cover. Please use an original cover, as the cover contributes to the safety of the seat.
- The seat must be secured with a seat belt or ISOFIX and Top Tether, even when it not on use. An unsecured seat may injure other passengers in the car in an urgent stop.
- The rigid items and plastic parts of a child restraint must be located and installed that they are not liable, during everyday use of vehicle, to become trapped by a movable seat or in door of the vehicle.
- Ensure that the seat is not damaged by heavy luggage, adjustable seats or slamming the car door etc.
- No alterations may be made to the product as this could affect part or the overall safety of the seat.  
In order to prevent damage to the cover, do not remove the product's logo.
- Before the purchase, please check that the seat is properly secured in your car.
- Take a short break in long journey. So that your child has some time for the relaxation.
- Set a good example yourself and always wear your seat belts.
- Tell your child that he/she should never play with the harness buckle.
- Any straps holding the restraint to the vehicle should be tight, that any straps restraining the child should be adjusted to the child's body, and that straps should not be twisted.
- Ensuring that any lap strap is worn low down, so the pelvis is firmly engaged.
- This product can not be used any more when it has been subject to violent stresses in an accident.
- Children can not be left in the product unattended.

## Questions:


Contact your supplier or retailer if you wish to make a warranty claim or have any other questions.

Your car seat can be fixed safely on most seats of the cars. However, some seats the belts are fixed so that proper installation is not possible, in that case, try another seat.

# KNOW YOUR CAR SEAT

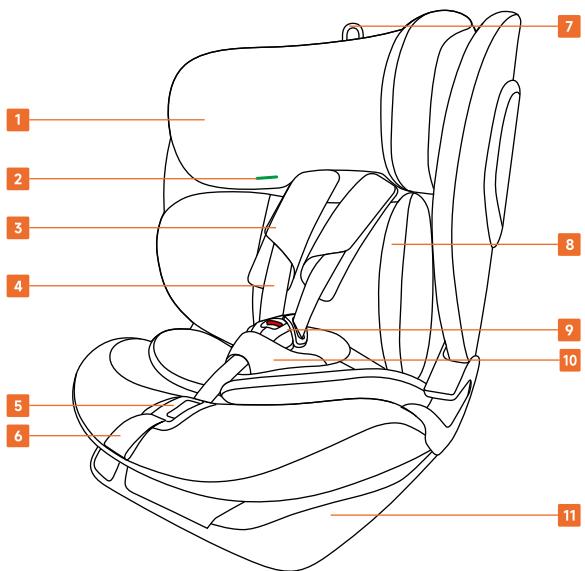

- 1 . Headrest
- 2 . Headrest Belt Guide
- 3 . Shoulder Belt Pads
- 4 . Shoulder Strap
- 5 . Harness Adjusting Button
- 6 . Harness Adjusting Strap
- 7 . Headrest Adjusting Loop
- 8 . Inner Cushion
- 9 . Harness Buckle
- 10 . Buckle Pad
- 11 . Rotation Button

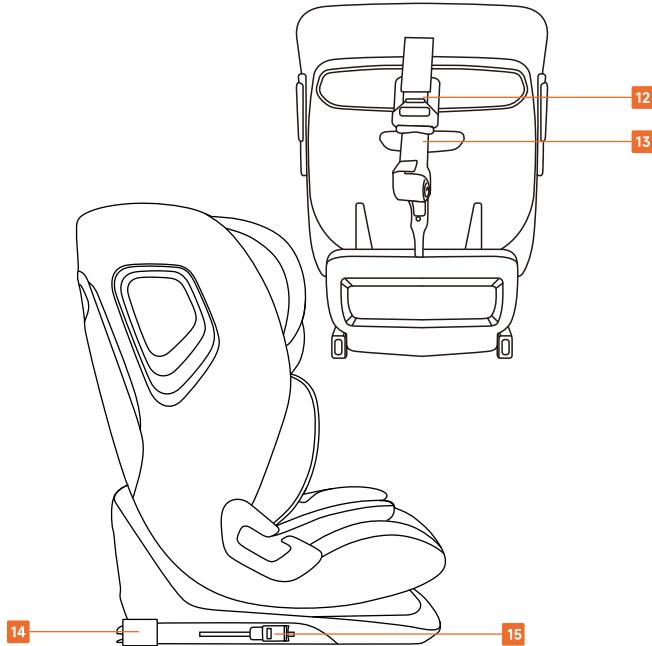

- 12. Top Tether
- 13. Instruction Pocket
- 14. ISOFIX Attachment
- 15. ISOFIX Release Button



## ISOFIX Guide

Insert the ISOFIX Guides onto the car's anchors to attach the child seat securely

# CAR SEAT VERSION

## 1. Product Description:

Type	Stature	Facing Direction	Installation	Approval Type
WDCS010	76-105cm	Forward	ISOFIX + Top Tether +Harness	i-Size
	100-150cm	Forward	Vehicle 3-Point-Belt +ISOFIX Attachment Vehicle 3-Point-Belt	i-Size Booster Seat

# SUITABILITY

## 2. Certification



...as a child safety seat installed a vehicle

<b>Child Safety Seat</b>	Tested and certified according to ECE R129		
	Stature	Forward	Forward
CICI TT	76-105cm	100-150cm	

## ECE = European Standard for Safety Equipment

The child safety seat has been designed, tested and certified according to the requirements of the European Standard for Child Safety Equipment (ECE R129/03).

The seal of approval E (in a circle) and the approval number are located on the approval label (sticker on the child safety seat).

This approval will be invalidated if you make any modifications to the child safety seat. Only the manufacturer is permitted to make modifications to the child safety seat.

# USE IN THE VEHICLE

## 3. Use in The Vehicle

### On front passenger seat

⚠ Yes

Only if there's no airbag or it is turned off! There must be an ISOFIX adapter (Slide the seat back and refer to vehicle instructions).


### WARNING

Never use the child car seat without it's fabric cover.

The fabric cover should not be replaced with any other than the ones recommended by manufacturer. The fabric cover will affect the integral performance of the baby/child restraint system.

Never try any other force points than the indicated, the main force points of this product are the ISOFIX adapter and the top tether.

## You Can Use Your Child Car Seat as Follows.

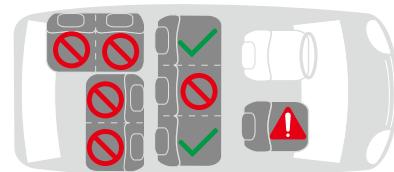


# SECURING YOUR BABY

## 4. Securing Your Baby

### 4.1 Using Baby Insert

#### CAUTION

If your baby's stature is greater than 87cm, Please take out the Inner cushion baby car seat.



- Always secure your baby in the car seat with the harness or seat belts.
- Never leave your baby unattended in the car seat when placing it on elevated surfaces (e.g. a table, nappy changing unit, etc.).
- Never allow the strap end to become caught in moving parts (e.g. automatic doors, escalators, etc.).
- Caution! The plastic parts of the car seat can heat up in the sun, posing a risk of burns to your baby.
- Protect your baby and the car seat from intense sunlight (e.g. by covering the seat with a light cloth).
- Take your baby out of the car seat as often as possible to relieve pressure on its spine. We recommend taking frequent breaks during long journeys. Additionally, avoid leaving your baby in the car seat for extended periods, even when not in the car.

### 4.2 Harness System & Headrest Adjustment

Loosen the shoulder straps by pressing the harness adjusting button and pull the shoulder straps as far forward as possible.



Pull the headrest adjusting loop to adjust the headrest upwards, pull the headrest adjusting loop and push the headrest back to slide the headrest downwards.



- Before installing the baby car seat into your vehicle, please move the headrest to the correct height for your baby/child and check that it is properly engaged by lightly sliding the headrest down.
- There are 12 adjustable headrest positions. Please adjust the headrest height close to your baby/child shoulder position, if at the middle of two positions, please use the higher position.

## SECURING YOUR BABY

### 4.3 Change the Reclining Positions



There are 5 recline positions of this product. To change the position, grasp the lever at the front of the seat, move the seat into the desired position until you hear an audible sound "click".



## INSTALLATION IN THE VEHICLE

### 5.1 Installation Instruction for STATURE 76-105cm, (child mass limit ≤18kg) Forward Facing, ISOFIX + Top Tether + Harness

Unfold Top Tether fully.  
Press the ISOFIX release button and slide the ISOFIX attachment out fully.




**Caution:** Please only move to next step when ISOFIX has been slid to the end with the red indicator showing.

Push the ISOFIX connectors directly into the anchor point until you hear an audible sound "click".




Grasp child seat to check that the child seat is fastened tightly and doesn't shake, If the child seat ISOFIX connectors are pulled out, please repeat the above steps and install it again. Once the child seat is secure, push the child seat rearwards far as it will go.




## INSTALLATION IN THE VEHICLE

Pull out the top tether and press the Tether strap release button to extend the strap until it is long enough to hook the User-ready tether anchorage behind.

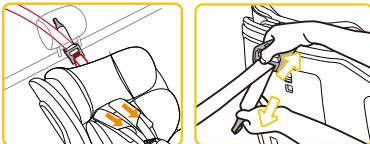

Hook the tether strap hook onto the anchorage point in the vehicle. There may be multiple anchorage points for the hook, please use the most suitable one.

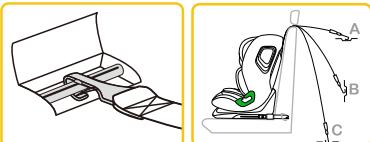

- Pull the tether strap end back to tighten it.

### CAUTION

If the top tether is tightened enough and properly, a green mark will turn up on the opposite end of the Strap release button. Please ensure you check this.




### CAUTION

Before every journey, make sure that the rotating part has been fully engaged.

Loosen the shoulder straps by pressing the harness adjusting button and pull the shoulder straps as far forward as possible.



Press the red button to open the buckle and spread the harness shoulder straps outwards to the sides of the child seat.



Place child in the car seat.




Please note a correctly adjust headrest ensures optimal protection for your child in the safety seat; the headrest must be adjusted so that the shoulder straps are at the same level as your child's shoulders or slightly above.



## INSTALLATION IN THE VEHICLE

Guide the two buckle latches together and engage them before putting them into the buckle, until you hear an audible "click" sound.



Tighten the harness adjusting strap and make sure the harness is reasonably tight. It should restrain but not make the child uncomfortable.



### CAUTION

Please ensure that the lap strap is worn low down, so that the pelvis is firmly engaged. Pull on the strap until it lies flat and is close against your child's body. The straps should be correctly adjusted and ensure they are not twisted.

### CAUTION



Pull the strap end straight towards you, not upwards or downwards. Please pay attention to the strap end. Whilst traveling (especially outside the car) should always be attached to the cover.

## 5.2 Installation Instruction for Stature 100-150cm, Forward Facing, ISOFIX Attachment + Vehicle 3-Point-Belt


Loosen the shoulder straps by pressing the harness adjusting button and pull the shoulder straps as far forward as possible.



### 5.2.1.2



Place the shoulder strap behind the headrest cover, open the cover of buckle storage, assemble the buckle properly, then put it in the storage and close finally.



**Caution:** Please only move to next step when ISOFIX has been fully extended with the red indicators showing.



## INSTALLATION IN THE VEHICLE




Push the ISOFIX connectors directly into the anchorage point until you hear an audible sound "click".



Grasp the child seat to check that the child seat is fastened tightly and doesn't shake. If the child seat ISOFIX connectors are pulled out, please repeat the above steps and install it again.

Once the child seat is secure, push the child seat rearwards as far as it will go.

The 100-150cm i-Size Booster seat can not use the top tether. When the top tether is not used, remove the top tether from the car anchor point and hang it on the rear side of the seat.

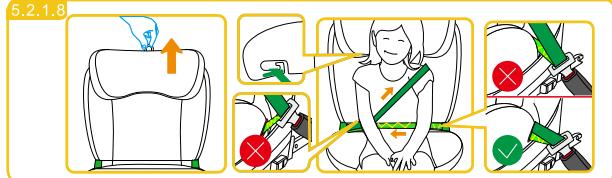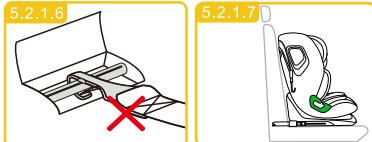
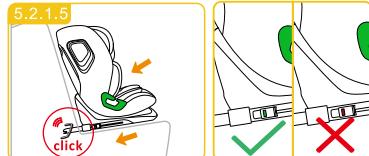


Adjust the height of the headrest to suit your child. Put the vehicle belt through the belt guide. Place your child into the baby car seat and let the vehicle belt pass the belt guide. Fasten the vehicle belt with an audible sound "click".

### CAUTION

Make sure lap strap is worn low down, so that the pelvis is firmly engaged. Pull on the strap until it lies flat and is close against your child's body.  
The straps should be correctly adjusted and ensure they are not twisted.

Remove the baby insert, loosen the shoulder straps by pressing the harness adjusting button and pull the harness shoulder as far forward as possible.

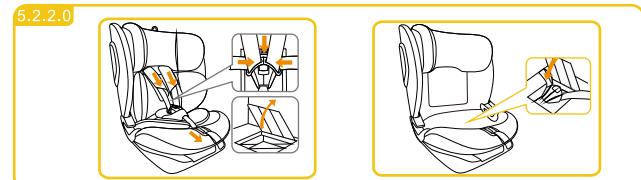


Place the shoulder strap behind the headrest cover, open the cover of buckle storage, assemble the buckle properly, then put it in the storage and close finally.

## INSTALLATION IN THE VEHICLE

### 5.3 Installation Instruction for Stature 100-150cm, Forward Facing, Vehicle 3-Point-Belt

The 100-150cm i-Size Booster seat can not use the top tether. When the top tether is not used, remove the top tether from the car anchor point and hang it on the rear side of the seat.

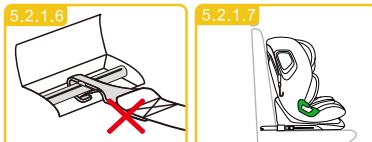

Adjust the height of the headrest to suit your child. Put the vehicle belt through the belt guide. Place your child into the baby car seat and let the vehicle belt pass the belt guide. Fasten the vehicle belt with an audible sound "click".

#### CAUTION

Make sure lap strap is worn low down, so that the pelvis is firmly engaged. Pull on the strap until it lies flat and is close against your child's body.

The straps should be correctly adjusted and ensure they are not twisted.

# CARE INSTRUCTIONS

### 6.1 Cleaning

**Please be sure to use only original seat covers, as the seat cover is important to the proper functioning of the system. Replacement seat covers are available from your retailer and or at branches.**

**The baby car seat must not be used without the cover.**

- The cover can be removed and washed circularly in a washing at 30°C in the neutral detergent. But please read the washing label on the cover carefully before washing. As the color of the cover may fade if washed above 30°C. Wringing or ironing the cover is forbidden (as the fabric may separate from the padding).
- The plastic part of the seat can be cleaned with soapy water. Do not use the strong detergents (such as solvents).
- The harness belt can be cleaned with soapy water.
- Do not remove the socket of the buckle from the strap.

### 6.2 Security Checking

For security, please read this "security checking" before your traveling. Check if the firmness of the shoulder strap system is suitable for your child, and if the height of the shoulder strap is with the proper height. Regularly check the 5-point harness belt of the seat to ensure no damage. In case of any damage or malfunction, please do not use the baby car seat and contact your supplier (see the address information on the warranty card). If you have any question, please contact the supplier.

## CARE INSTRUCTIONS

### **6.3 Warranty**

We provide a 3-year warranty for this child car seat against manufacturing or material defects. The warranty period begins on the date of purchase. To validate the warranty, please keep the invoice and register your product on [jovkids.com](http://jovkids.com).

#### **The Warranty Does Not Cover:**

- Natural signs of wear and damage resulting from excessive stress.
- Damage resulting from inappropriate or improper use.
- Color fastness may diminish when exposed to UV radiation. However, all fabrics fade when exposed to UV radiation. This is not a material defect but a normal sign of wear that is not covered by the warranty.
- Buckle malfunction is often due to the accumulation of dirt and dust, which may prevent it from working properly. If this occurs, please check if you can clean it yourself without damaging the buckle. If cleaning does not resolve the issue, please contact after sales service.

**For warranty claims, please contact your retailer directly.  
They will provide the necessary advice and support.  
When processing claims, product-specific depreciation rates  
will be applied. Please refer to our General Terms and  
Conditions, which are available from your retailer.**